


100 A & 200 A Overhead Service on Building

GENERAL INFORMATION


KV REMC ENGINEER MUST APPROVE METER LOCATION PRIOR TO INSTALLATION.

MEANS OF DISCONNECT MUST BE WITHIN 10' OF METER BASE.

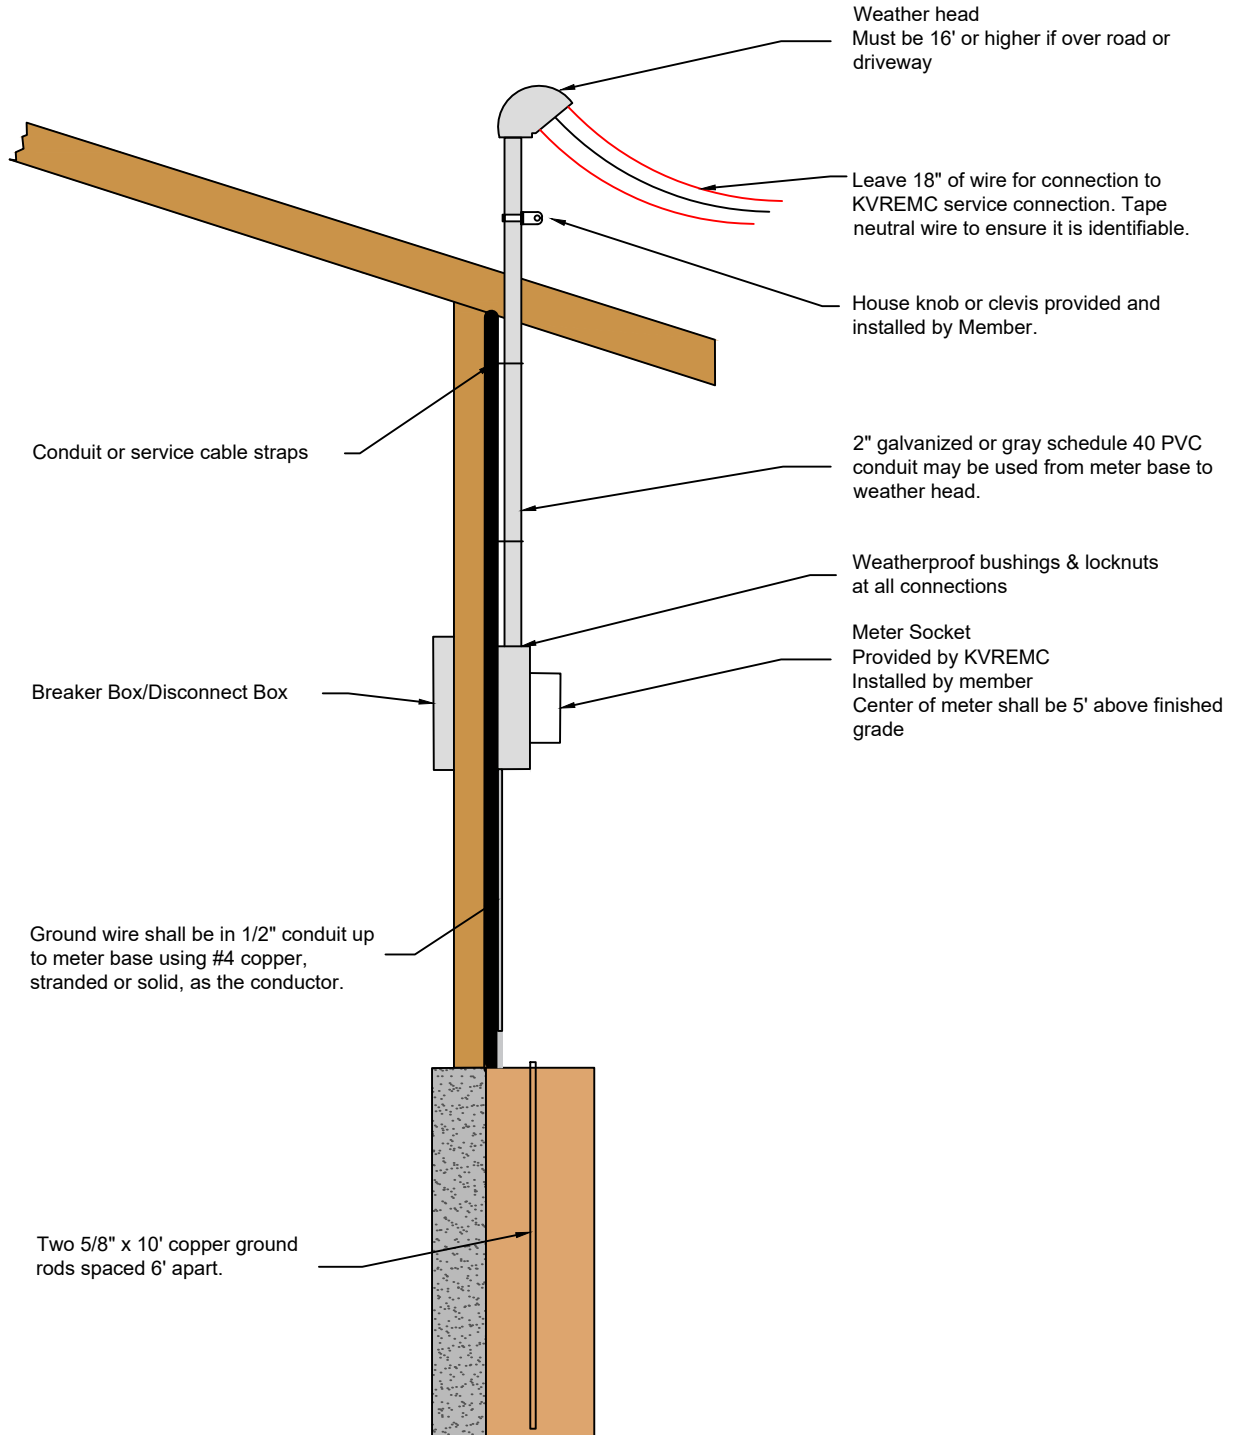

SERVICE ENTRANCE GUIDE

SERVICE ENTRANCE SIZE	CONDUIT INTO METER BASE	1PH, 3W 120/240V	GROUNDING (COPPER ONLY, STRANDED OR SOLID)
100A	1.5" OR 2"	#4 CU	#4 CU
	2"	#2 AL	#4 CU
200A	2"	2/0 CU	#2 CU
	2.5"	4/0 AL	#2 CU
320A (2 - 200A DISCONNECTS)	3"	2/0 CU PER DISCONNECT	#2 CU
	3"	4/0 AL PER DISCONNECT	#2 CU
320A (1 - 400A DISCONNECT)	3"	350MCM CU	#2 CU
	3"	500MCM AL	#2 CU

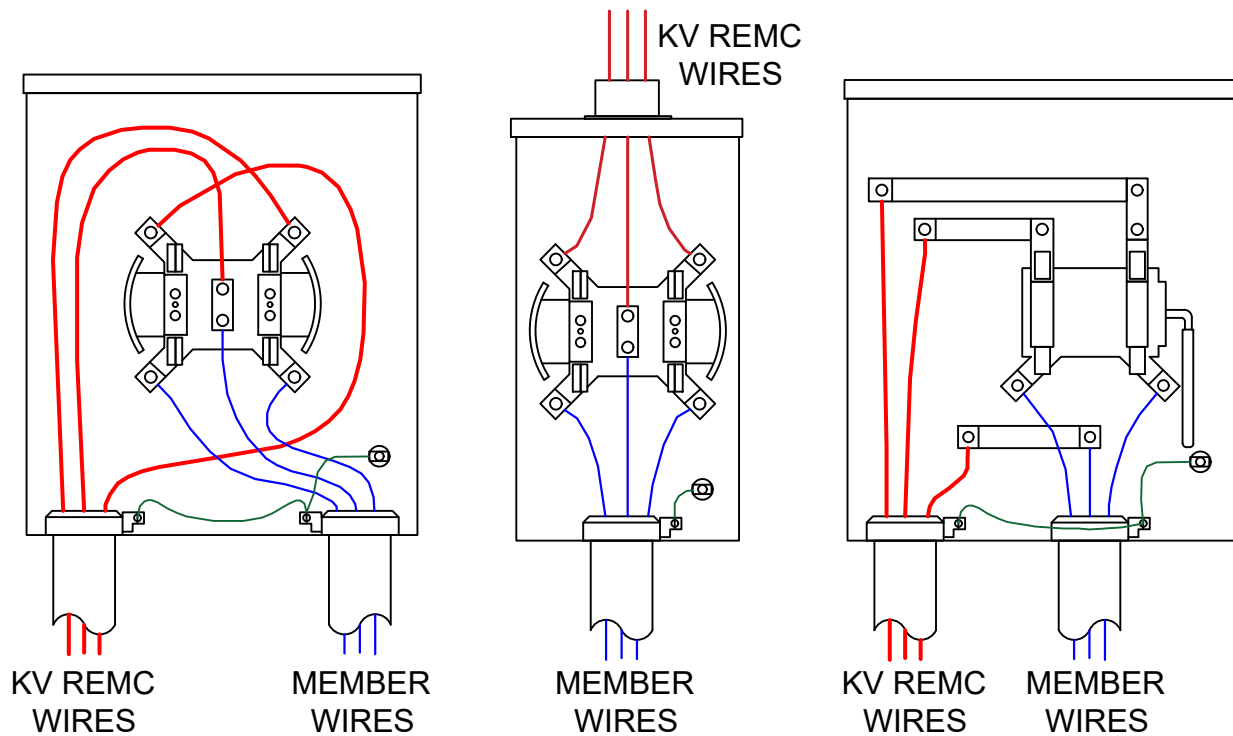

200A 120/240V, 1PH, 3W

**OVERHEAD
100/200A 120/240V
1PH, 3W**

**320/400A 120/240V
1PH, 3W**